

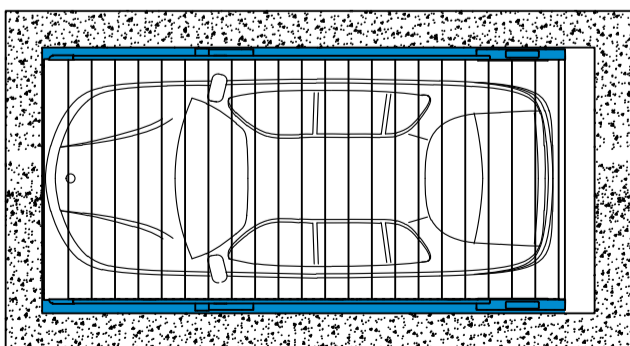


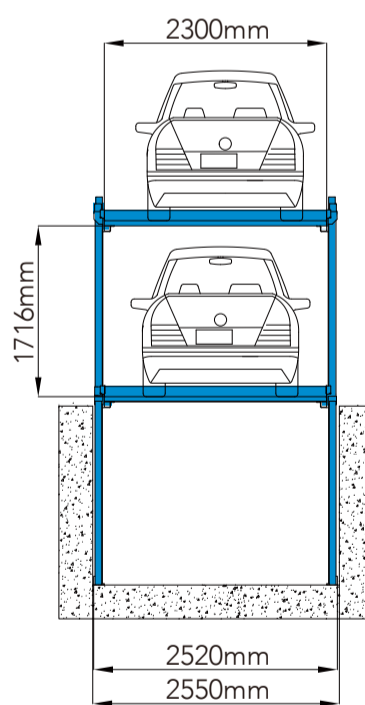

Starke 2127 and Starke 2121 are newly developed parking lifts of pit installation, offering 2 parking spaces above each other, one in pit and another on ground. Their new structure allows 2300mm entrance width within total system width of 2550mm only. Both are independent parking, no cars need to drive out before using the other platform. Operation can be achieved by wall-mounted key switch panel.

Independent parking
Capacity options are 2100kg and 2700kg
Platform width up to 2500mm
Vehicle height in low level selectable from 1500 to 1900mm.
Dual hydraulic cylinders driven
Synchronization chains keep platform level at all conditions
Mechanical anti-falling locks provides ultra-safety
Additional steel ropes offer secondary protection from falling
Galvanized platform plates, high heel friendly
Both models are to be installed in pit with posts fixed to walls.
Akzo Nobel powder coating provides long lasting surficial protection
High level quality guarantee (German TUV / CE certified)

Dimensions & Specifications

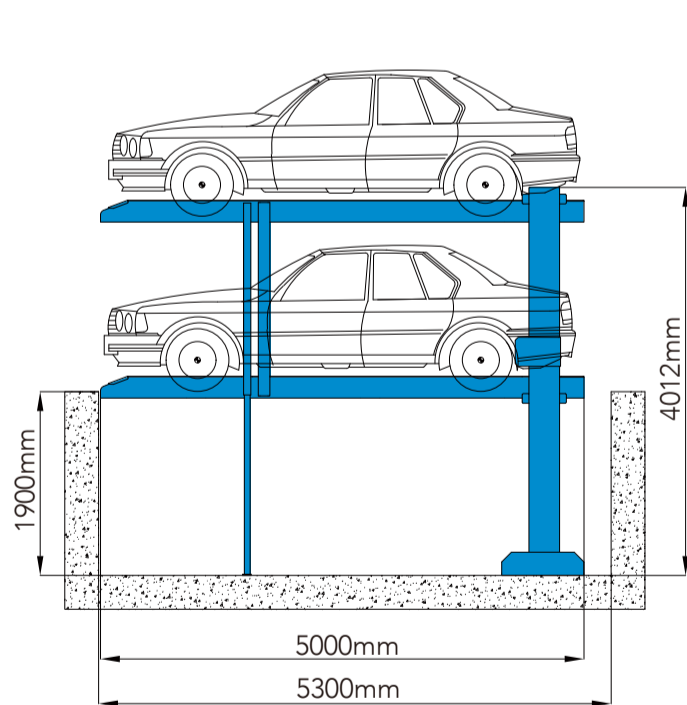

Model	Starke 2127
Vehicles parked per unit	2
Rated capacity	2700kg
Available car length	5000mm
Available car width	2050mm
Available car height	1700mm
Waving plate	Galvanized steel sheet
Drive mode	Hydraulic cylinder + chains
Operation	Key switch
Lifting speed	35s
Descending speed	25s
Power supply	200-480V, 3P, 50/60Hz
Finishing	Powder coating with Akzo Nobel powder