

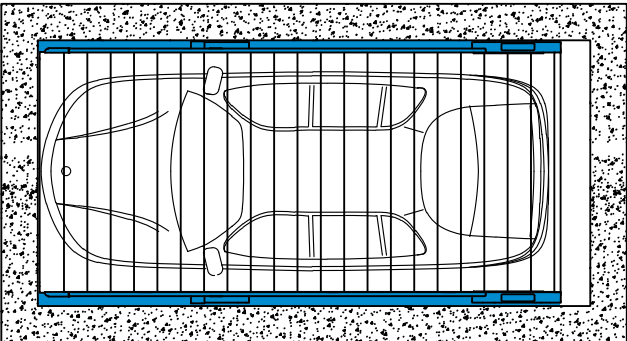


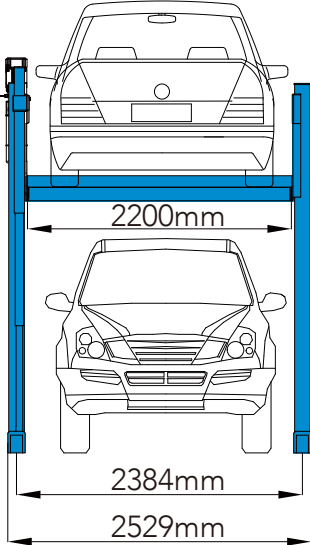

Starke 1127 and Starke 1121 are wholly new designed stackers with more ideal structure that offers 100mm wider platform but within smaller installation space. Each unit provides 2 dependent parking spaces, ground car has to be moved to use the upper platform. Suitable for permanent parking, valet parking, car storage, or other places with attendant. When used indoor, operation can be achieved by wall-mounted key switch panel. For outdoor usage, control post is also optional.

- Parking 2 cars in each unit
- Lifting capacity 2100kg or 2700kg.
- Platform width 2200mm – 2700mm
- Car heights on ground up to 2050mm.
- Direct drive by German structure cylinder.
- Mechanical anti-falling locks enable multiple stopping heights.
- Synchronization chain keep platform level under all conditions.
- 24v control circuit protects users from electric shock
- Galvanized platform, high-heel friendly
- Anti-rust bolts & nuts passing 48hrs Salt Spray Test.
- Akzo Nobel powder coating provides long lasting surficial protection
- Top class quality guarantee (German TUV / CE certified)

Dimensions & Specifications

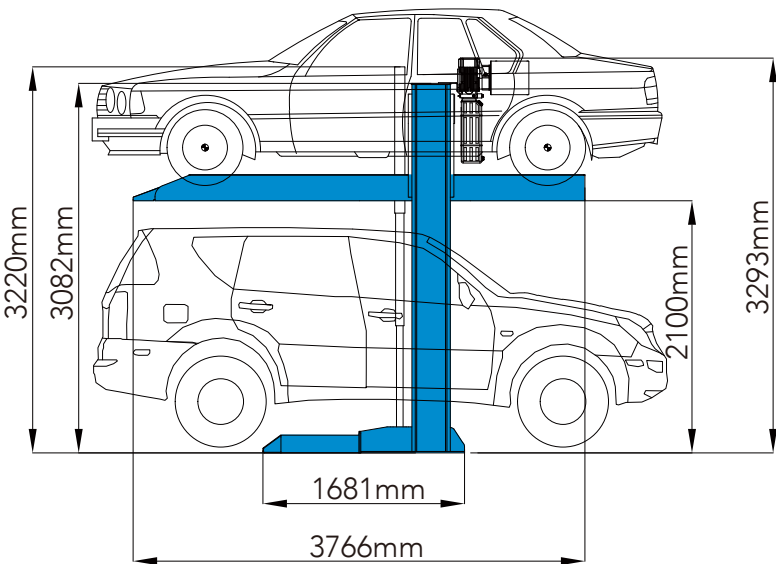

Model	Starke 1121
Lifting capacity	2100kg
Lifting height	2100mm
Usable platform width	2200mm
Power pack	2.2Kw hydraulic pump
Available voltage of power supply	100V-480V, 1 or 3 Phase, 50/60Hz
Operation mode	Key switch
Operation voltage	24V
Safety lock	Dynamic anti-falling lock
Lock release	Electric auto release
Rising / descending speed	<55s
Finishing	Powder coating with Akzo Nobel powder